


Durathane

Open End Punch Strippers

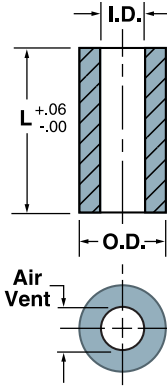


Ordering Example:
Quantity Description
6 O-37A

All are oil and solvent resistant 95A durometer. All provide greater pressures than equal sized steel die springs. All are easy to install and dampen vibration. Pop-On's closed end gives more positive stripping and full stripping around periphery of punch point. Open end more economical.

Pop-On

Closed End Punch Strippers

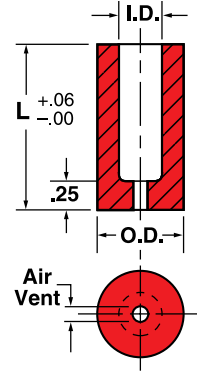

Ordering Example:
Quantity Description
7 U-62B

I.D. Inch	O.D. Inch	Length L Inch	Catalog Number	Approx. Stripping Pressure in Lbs. at deflection of		
				.187	.281	.437
.187	.688	1.25	O-18	250		
		1.50	O-18A	230	350	
.250	.750	1.25	O-25	280		
		1.50	O-25A	275	465	
		1.75	O-25B	220	375	490
.312	.812	1.25	O-31	320		
		1.50	O-31A	300	450	
		1.75	O-31B	270	400	575
		2.00	O-31C	240	370	600
.375	.875	1.25	O-37	420		
		1.50	O-37A	385	625	
		1.75	O-37B	355	575	760
		2.00	O-37C	310	515	670
.500	1.000	1.25	O-50	520		
		1.50	O-50A	450	725	
		1.75	O-50B	435	680	875
		2.00	O-50C	315	510	650
.625	1.125	1.25	O-62	600		
		1.50	O-62A	520	835	
		1.75	O-62B	480	775	1000
		2.00	O-62C	440	730	935
.750	1.500	1.75	O-75B	500	800	1200
		2.00	O-75C	400	700	1100
		2.25	O-75D	350	650	1000
		2.50	O-75E	325	600	900
		2.75	O-75F	300	550	800
.875	1.750	1.75	O-87B	1500	2200	3400
		2.00	O-87C	1200	1900	2800
		2.25	O-87D	1150	1850	2400
		2.50	O-87E	900	1450	1900
		2.75	O-87F	850	1350	1800
1.000	2.000	1.75	O-100B	2000	3000	3500
		2.00	O-100C	1600	2600	3400
		2.25	O-100D	1400	2300	3200
		2.50	O-100E	1200	2000	3000
		2.75	O-100F	1000	1800	2800

I.D. Inch	O.D. Inch	Length L Inch	Catalog Number	Approx. Stripping Pressure in Lbs. at deflection of		
				.125	.25	.375
.187	.688	1.25	U-18	250	400	
		1.50	U-18A	230	350	
.250	.750	1.25	U-25	280	475	
		1.50	U-25A	275	465	
		1.75	U-25B	220	375	490
.312	.812	1.25	U-31	320	500	
		1.50	U-31A	300	450	
		1.75	U-31B	270	400	575
		2.00	U-31C	240	370	600
.375	.875	1.25	U-37	420	695	
		1.50	U-37A	385	625	
		1.75	U-37B	355	575	760
		2.00	U-37C	310	515	670
.500	1.000	1.25	U-50	520	790	
		1.50	U-50A	450	725	
		1.75	U-50B	435	680	875
		2.00	U-50C	315	510	650
.625	1.125	1.25	U-62	600	925	
		1.50	U-62A	520	835	
		1.75	U-62B	480	775	1000
		2.00	U-62C	440	730	935
.750	1.500	1.75	U-75B	500	800	1200
		2.00	U-75C	400	700	1100
		2.25	U-75D	350	650	1000
		2.50	U-75E	325	600	900
		2.75	U-75F	300	550	800
.875	1.750	1.75	U-87B	1500	2200	3400
		2.00	U-87C	1200	1900	2800
		2.25	U-87D	1150	1850	2400
		2.50	U-87E	900	1450	1900
		2.75	U-87F	850	1350	1800
1.000	2.000	1.75	U-100B	2000	3000	3500
		2.00	U-100C	1600	2600	3400
		2.25	U-100D	1400	2300	3200
		2.50	U-100E	1200	2000	3000
		2.75	U-100F	1000	1800	2800