

Ordering Example: Qty Type Code L₂/L W P
25 CDRO 010 2590 5.00 x 8.50

Steel: M2 Rc 60-63
Heads Rc 40-55 (25 mm Ø and smaller)

TOLERANCES

Round P $\begin{matrix} +0.01 \\ -0.00 \end{matrix}$ $\text{Ⓢ} 0.01$ P to D


Shape P, W ± 0.01 $\text{Ⓢ} 0.02$ P,W to D

Manufactured to ISO and NAPMA standards where applicable.

Back Draft 0.1/100mm L₂ max.



Reflected View




Shank		Head H mm	Point Length L ₂		Lengths L				Round Point Range P	Shapes		Replacement Retracto Kit*
D mm	Code No.		Std	Alt	71	80	90	100		Min W	Max P/G	
10	010	13	19	25	•	•	•	•	4.50 - 9.99	4.50	10.00	K6M
13	013	16	19	25	•	•	•	•	6.00 - 12.99	6.00	13.00	K6M
16	016	19	19	25	•	•	•	•	8.00 - 15.99	7.20	16.00	K9M
20	020	23	19	25	•	•	•	•	10.00 - 19.99	8.00	20.00	K9M
25	025	28	19	25	•	•	•	•	12.00 - 24.99	9.00	25.00	K9M
32	032	35	25	30	•	•	•	•	16.00 - 31.99	10.00	32.00	K9M


All Lengths in Light Blue Panel have Hot Forged Heads for added strength and toughness.

Optional Locating Methods See Page 38 for details and options.


*Retracto Kits available see Page 36 for details. 32 mm Ø = no side hole.

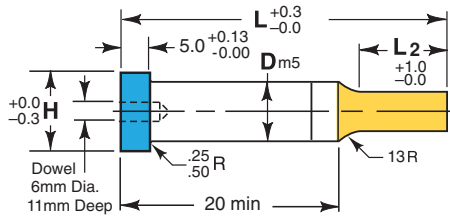

Ordering Example: Qty Type Code L₂/L P
50 CDSC 016 1990 x 10.00

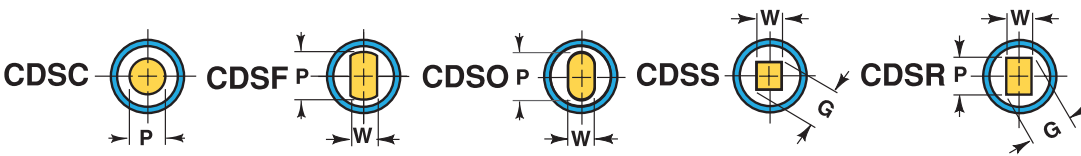

Reflected View



Shank		Head H mm	Point Length L ₂		Lengths L								Round Point Range P	Shapes	
D mm	Code No.		Std	Alt	71	80	90	100	110	125	130	140		Min W	Max P/G
10	010	13	19	25	•	•	•	•					4.50 - 10.00	4.50	9.99
13	013	16	19	25	•	•	•	•	•	•	•	•	6.00 - 13.00	6.00	12.99
16	016	19	19	25	•	•	•	•	•	•	•	•	8.00 - 16.00	7.20	15.99
20	020	23	19	25	•	•	•	•	•	•	•	•	10.00 - 20.00	8.00	19.99
25	025	28	19	25	•	•	•	•	•	•	•	•	12.00 - 25.00	9.00	24.99
32	032	35	25	30	•	•	•	•	•				16.00 - 32.00	10.00	31.99

All Lengths in Light Blue Panel have Hot Forged Heads for added strength and toughness.

Optional Locating Methods See Page 38 for details and options.

• Available D2 only RC 60-63

Standard Alterations are changes that are beyond the ranges listed in the catalog that can be altered for a minimal charge. See page 37.

For additional standard forms and configurations see pages 32 and 33.