


HARD HAT

Closed End Punch Strippers

| I.D. mm | O.D. mm | Length L mm | Catalog Number | Approx. Stripping Pressure in kg at deflection of | | For Punch Length |
|---------|---------|-------------|----------------|---|---------|------------------|
| | | | | 3.0 mm | 6.5 mm | |
| 6 | 19 | 25 | UHL00625 | 164 kg | 275 kg | 50 mm |
| | | 31 | UHL00631 | 150 kg | 255 kg | 56 mm |
| | | 38 | UHL00638 | 140 kg | 241 kg | 63 mm |
| | | 46 | UHL00646 | 130 kg | 225 kg | 71 mm |
| | | 55 | UHL00655 | 116 kg | 210 kg | 80 mm |
| 10 | 23 | 28 | UHH01028 | 246 kg | 390 kg | 63 mm |
| | | 31 | UHL01031 | 240 kg | 385 kg | 50 mm |
| | | 36 | UHH01036 | 215 kg | 360 kg | 71 mm |
| | | 38 | UHL01038 | 205 kg | 350 kg | 63 mm |
| | | 45 | UHH01045 | 190 kg | 327 kg | 80 mm |
| | | 46 | UHL01046 | 185 kg | 324 kg | 71 mm |
| | | 55 | UHL01055 | 173 kg | 250 kg | 80 mm |
| | | 55 | UHH01055 | 173 kg | 250 kg | 90 mm |
| | | 65 | UHH01065 | 140 kg | 198 kg | 100 mm |
| 13 | 26 | 31 | UHL01331 | 305 kg | 435 kg | 50 mm |
| | | 36 | UHH01336 | 270 kg | 385 kg | 71 mm |
| | | 38 | UHL01338 | 265 kg | 370 kg | 63 mm |
| | | 45 | UHH01345 | 200 kg | 310 kg | 80 mm |
| | | 46 | UHL01346 | 192 kg | 295 kg | 71 mm |
| | | 55 | UHL01355 | 150 kg | 260 kg | 80 mm |
| | | 55 | UHH01355 | 150 kg | 260 kg | 90 mm |
| | | 65 | UHH01365 | 140 kg | 210 kg | 100 mm |
| 16 | 30 | 36 | UHH01636 | 277 kg | 425 kg | 71 mm |
| | | 38 | UHL01638 | 267 kg | 420 kg | 63 mm |
| | | 45 | UHH01645 | 249 kg | 388 kg | 80 mm |
| | | 46 | UHL01646 | 245 kg | 384 kg | 71 mm |
| | | 55 | UHH01655 | 210 kg | 365 kg | 90 mm |
| | | 55 | UHL01655 | 180 kg | 276 kg | 80 mm |
| | | 65 | UHH01665 | 175 kg | 345 kg | 100 mm |
| 20 | 38 | 36 | UHH02036 | 290 kg | 420 kg | 71 mm |
| | | 38 | UHL02038 | 275 kg | 405 kg | 63 mm |
| | | 45 | UHH02045 | 245 kg | 387 kg | 80 mm |
| | | 46 | UHL02046 | 240 kg | 385 kg | 71 mm |
| | | 55 | UHL02055 | 210 kg | 340 kg | 80 mm |
| | | 55 | UHH02055 | 210 kg | 340 kg | 90 mm |
| | | 65 | UHH02065 | 185 kg | 320 kg | 100 mm |
| 25 | 50 | 45 | UHH02545 | 930 kg | 1450 kg | 80 mm |
| | | 46 | UHL02546 | 910 kg | 1425 kg | 71 mm |
| | | 55 | UHL02555 | 725 kg | 1215 kg | 80 mm |
| | | 55 | UHH02555 | 725 kg | 1215 kg | 90 mm |
| | | 65 | UHH02565 | 640 kg | 1015 kg | 100 mm |
| 32 | 57 | 45 | UHH03245 | 1485 kg | 1775 kg | 80 mm |
| | | 46 | UHL03246 | 1480 kg | 1750 kg | 71 mm |
| | | 55 | UHL03255 | 1285 kg | 1530 kg | 80 mm |
| | | 55 | UHH03255 | 1285 kg | 1530 kg | 90 mm |
| | | 65 | UHH03265 | 1075 kg | 1300 kg | 100 mm |

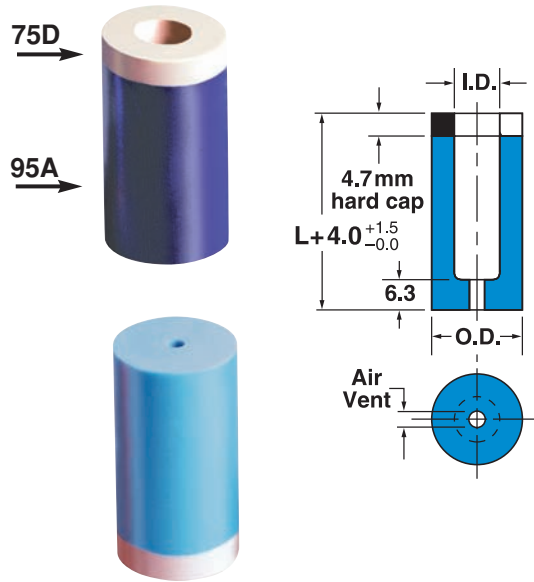

Ordering Example:
Quantity Description
13 UHL01338

Ordering Example:
Quantity Description
6 UHH01665

UHL is designed for light duty retainer

UHH is designed for heavy duty retainer

All the benefits of the Pop-On Stripper plus:

- Patented 75D Hard-Hat designed to withstand the sharp edges of standard retainers.
- Co-injection molded to blend 2 different durometers of Urethane into one homogeneous piece without adhesive or bonding agents.
- 4 mm preload in for positive holding pressure as the punch contacts the material.